



PUP_DUAL24P_T2R4

PUP_DUAL24P_T2R4 (Figure 1) is a MIMO radar development kit. It works at K band with two transmitting and four receiving channels.

Two transmitter antennas and four receiver antennas are configured as MIMO array (Figure 2). Eight signals can be virtually extracted from the receivers using the orthogonality of the transmitted signals, thereby obtaining a finer spatial resolution compared to its array counterpart.

The RF front-end frequency sweep is implemented with a phase-locked loop (PLL) to achieve linearity of frequency modulations. The FPGA-based controller connects the front end with an eight-channel LVDS (low-voltage differential signaling) 65Msps pipeline ADC module and connects the user's computer with a high speed (up to 480Mb/s) USB interface.

The kit comes with a user-friendly Matlab GUI (graphical user interface) source code. It is also an example of the working process, data format, and signal processing that can be quickly converted to code in your own projects.

The kit works between 24GHz and 25GHz and is expandable to 23.5GHz-26GHz. The detectable range is approximately 25 meters for people and 50 meters for a medium-sized vehicle.

Raw data can be recorded for post-processing.



Figure 1. PUP_DUAL24P_T2R4

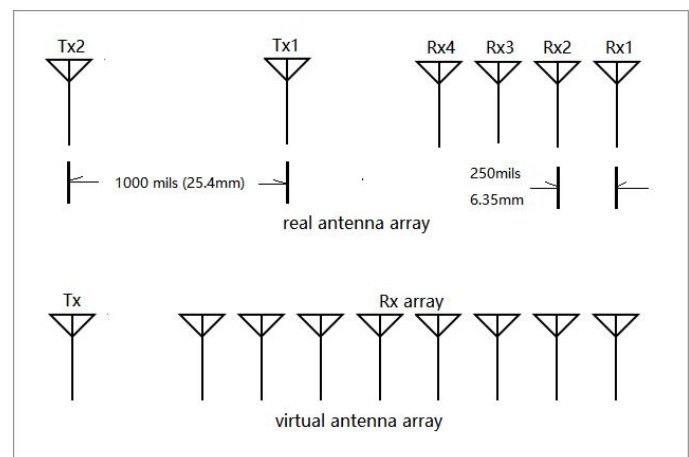


Figure 2. Antenna array

SPECIFICATIONS

Specification	Minimum	Typical	Maximum
Channels		2x Transmitters, 4x Receivers	
Antennas		6x On Board Patch Antennas	
Modulations		FMCW, CW	
Typical Frequency Range	24GHz		25GHz
Expandable Frequency Range	23.5GHz		26GHz
Sweep Time		0.5ms, 1ms, 2ms, 4ms, 8ms	
Sample Per Sweep		128, 256, 512, 1024, 2048, 4096	
Tuning Voltage	0		4V
Tuning Sensitivity		0.8GHz/v	
Transmitting Power	16dBm	17dBm	18dBm
SSB Phase Noise @1MHz offset		-99dBc	
Noise Figure		12dB	
Maximum Input power		5dBm	
IIP_1dB		-12dBm	
Supply Voltage	5.75V	6V	6.25V
Supply Current		1100mA	
Operation Temperature	-40°C		85°C
Dimensions		L: 130mm, W: 102mm, H: 15mm	
Weight		12oz	

Luswave Technology LLC

Sales: +1-703-338-8380 **Technical:** +1-571-296-6435 **Fax:** +1-571-223-5483 **Email:** service@luswave.com