



## PUP\_DUAL24C\_T2R4

PUP\_EN24C\_T2R4 (Figure 1) is a MIMO radar development kit. It works at K band with two transmitting and four receiving channels.

If PUP\_ATN24P\_T2R4 patch antenna (Figure 2) is selected, the kit can be configured as MIMO radar. The best work frequency for this antenna is 23.5GHz-24.5GHz with 8dB gain. Two transmitter antennas and four receiver antennas are configured as MIMO array (Figure 3). Eight signals can be virtually extracted from the receivers using the orthogonality of the transmitted signals, thereby obtaining a finer spatial resolution compared to its array counterpart.



Figure 1. PUP\_EN24C\_T2R4

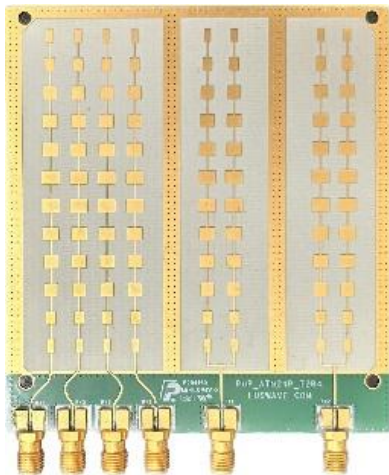


Figure 2. PUP\_ATN24P\_T2R4

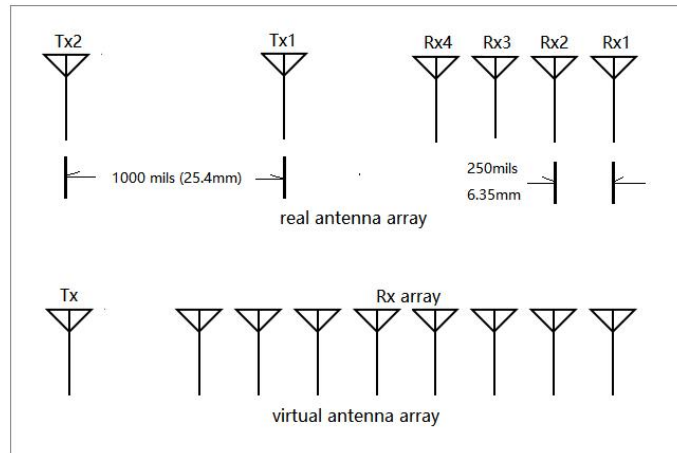


Figure 3. Virtual antenna array

If six PUP\_ATN24C\_HN\_8 horn antennas (Figure 4) or six PUP\_ATN24C\_HN\_10/ 15 antennas (Figure 5) are selected, longer RF cables can be used and the kit can be configured as bi-static radar or interferometric radar. Users can select their own antennas and RF cables.

The RF front-end frequency sweep is implemented with a phase-locked loop (PLL) to achieve linearity of frequency modulations. The FPGA-based controller connects the front end with an eight-channel LVDS (low-voltage differential signaling) 50Msps pipeline ADC module and connects the user's computer with a high speed (up to 480Mb/s) USB interface.

Luswave Technology LLC

Sales: +1-703-338-8380 Technical: +1-571-296-6435 Fax: +1-571-223-5483 Email: service@luswave.com



Figure 4. PUP\_ATN24C\_HN\_8



Figure 5. PUP\_ATN24C\_HN\_10/\_15

The kit comes with a user-friendly Matlab GUI (graphical user interface) source code. It is also an example of the working process, data format, and signal processing that can be quickly converted to code in your own projects.

The kit works between 24GHz and 25GHz and is expandable to 23.5GHz-26GHz. The detectable range is approximately 25 meters for people and 60 meters for medium-sized vehicles.

Raw data can be recorded for post-processing.

## SPECIFICATIONS

| Specification                 | Minimum | Typical                       | Maximum |
|-------------------------------|---------|-------------------------------|---------|
| Channels                      |         | 2x Transmitters, 4x Receivers |         |
| Antennas                      |         | 6x External Antennas          |         |
| Modulations                   |         | FMCW, CW                      |         |
| Typical Frequency Range       | 24GHz   |                               | 25GHz   |
| Expandable Frequency Range    | 23.5GHz |                               | 26GHz   |
| Sweep Time                    |         | 0.5ms, 1ms, 2ms, 4ms, 8ms     |         |
| Sample Per Sweep              |         | 128,256,512,1024,2048,4096    |         |
| Tuning Voltage                | 0       |                               | 4V      |
| Tuning Sensitivity            |         | 0.8GHz/v                      |         |
| Transmitting Power (24-25GHz) | 19dBm   | 20dBm                         | 21dBm   |
| SSB Phase Noise @1MHz offset  |         | -99dBc                        |         |
| Noise Figure                  |         | 12dB                          |         |
| Maximum Input power           |         | 5dBm                          |         |
| IIP_1dB                       |         | -12dBm                        |         |
| Supply Voltage                | 5.75V   | 6V                            | 6.25V   |
| Supply Current                |         | 1100mA                        |         |
| Operation Temperature         | -40°C   |                               | 85°C    |
| Dimensions                    |         | L: 130mm, W: 102mm, H: 15mm   |         |
| Weight                        |         | 10oz                          |         |

Luswave Technology LLC

Sales: +1-703-338-8380 Technical: +1-571-296-6435 Fax: +1-571-223-5483 Email: service@luswave.com